


FACTSHEET:

AUTOMATIC MINIATURE CLEAN AGENT FIRE EXTINGUISHING UNIT


THE SOLUTION FOR NUMEROUS SECTORS

The Automatic Miniature Clean Agent Fire Extinguishing unit (AMFE) provides effective protection against fire hazards in industrial and mining environments, in switch cabinets, in media technology and many other applications.

- NO AGENT RESIDUE
- NO CLEAN UP




FACTSHEET:
AUTOMATIC MINIATURE CLEAN AGENT
FIRE EXTINGUISHING UNIT

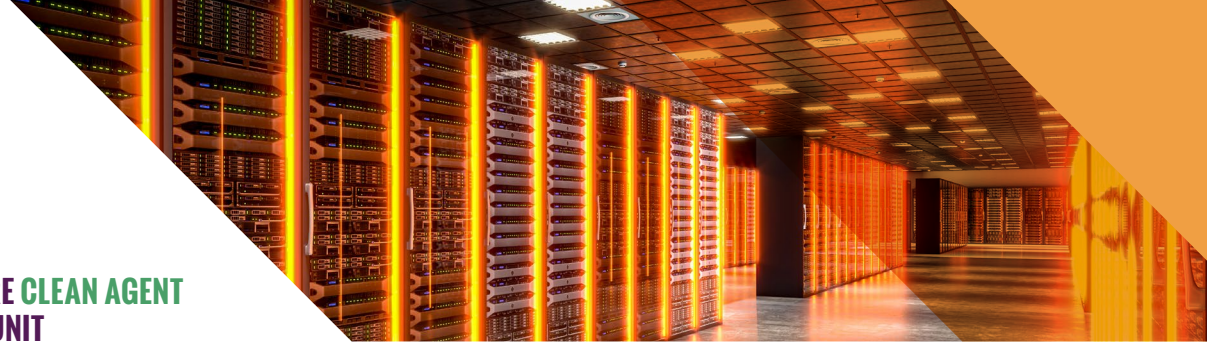

THE SYSTEM: QUICK & EASY INSTALL

The AMFE automatically detects a fire in switch cabinets and electrical appliances. The system prevents the spread of fire and further damage to property. The Mobiak AMFE protects devices and systems in industry, mining, households and consumer electronics such as machinery, media technology, snack machines, etc.

Safe triggering thanks to certified Thermo Bulb technology

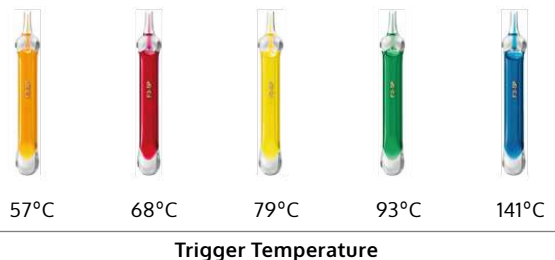

Simple maintenance options




Once a year by checking the pressure range



Digital maintenance through continuous pressure measurement


Cylinder grows with protection volume

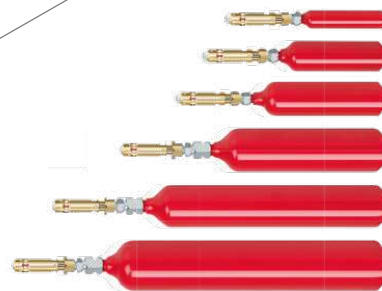

Size	VdS 2381 (5,8%)m ³	EN 15004,2 (5,3%)m ³
0	0,046	0,050
1	0,137	0,151
2	0,229	0,251
3	0,459	0,505
4	0,686	0,754
5	1,149	1,264




FACTSHEET:
**AUTOMATIC MINIATURE CLEAN AGENT
 FIRE EXTINGUISHING UNIT**

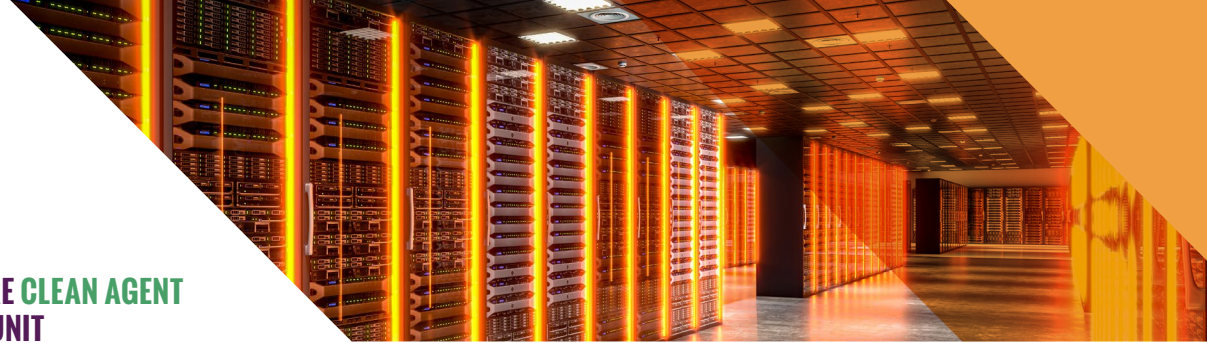

OUR PORTFOLIO

Choose from a variety of release and activation options

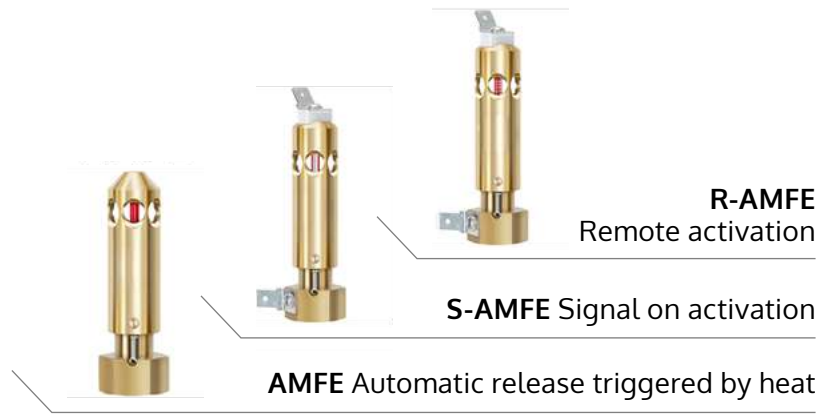

PRODUCT OVERVIEW

AMFE | S-AMFE | R-AMFE RELEASE UNITS

AMFE	Article number
68°C	MBK16-APM-SPR68
79°C	MBK16-APM-SPR79
93°C	MBK16-APM-SPR93
141°C	MBK16-APM-SPR141
182°C	MBK16-APM-SPR182



Thermal activation

S-AMFE	Article number
68°C	MBK16-APM-SPRD68
79°C	MBK16-APM-SPRD79
93°C	MBK16-APM-SPRD93



Thermal triggering and signalling


R-AMFE	Article number
68°C	MBK16-APM-RPRD68
79°C	MBK16-APM-RPRD79
93°C	MBK16-APM-RPRD93



Thermal or electrical triggering and signalling



FACTSHEET:
**AUTOMATIC MINIATURE CLEAN AGENT
 FIRE EXTINGUISHING UNIT**

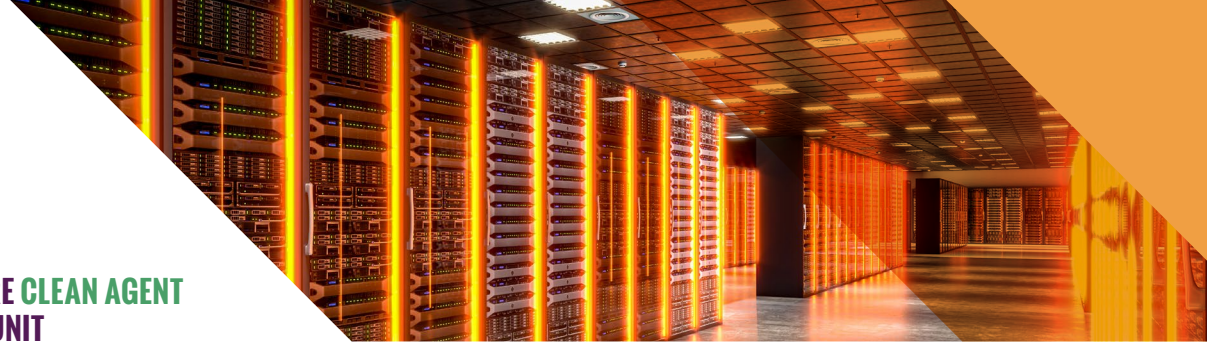

EXTINGUISHING AGENT CYLINDERS FOR THE AMFE SERIES WITH 4-20mA PRESSURE SENSOR (2m CABLE)

Cylinder size	Article number
Size 0	MBK18-APM-NVC22-PSC
Size 1	MBK18-APM-NVC72-PSC
Size 2	MBK18-APM-NVC120-PSC
Size 3	MBK18-APM-NVC241-PSC
Size 4	MBK18-APM-NVC360-PSC
Size 5	MBK18-APM-NVC603-PSC



In combination with
 AMFE, S- or R-AMFE



EXTINGUISHING AGENT CYLINDERS FOR THE AMFE SERIES WITH PRESSURE SENSOR (M12 CONNECTOR)

Cylinder size	Article number
Size 0	MBK18-APM-NVC22-PSP
Size 1	MBK18-APM-NVC72-PSP
Size 2	MBK18-APM-NVC120-PSP
Size 3	MBK18-APM-NVC241-PSP
Size 4	MBK18-APM-NVC360-PSP
Size 5	MBK18-APM-NVC603-PSP



In combination with
 AMFE, S- or R-AMFE



HOLDER KITS FOR EXTINGUISHING AGENT CYLINDERS WITH AMFE RELEASE HEAD

Bracket size	Article number	For cylinder size	Recommended number of pieces per cylinder for reliable and vibration-resistant hold including screw nut and washer
Size 0	MBK18-APM-NVC22-BRACKET	Size 0	1
Size 1	MBK18-APM-NVC72-BRACKET	Size 1	1
Size 2	MBK18-APM-NVC120-BRACKET	Size 2	1
Size 3	MBK18-APM-NVC241-BRACKET	Size 3	2
Size 4	MBK18-APM-NVC360-BRACKET	Size 4	2
Size 5	MBK18-APM-NVC603-BRACKET	Size 5	2



ABOUT FK-5-112 GAS: THE CLEAN AGENT

FK-5-112 is an environmentally suitable clean extinguishing agent that has undergone considerable testing to determine its fire performance characteristics as a clean agent.

